AT Power Throttles Ltd


Unit 9, Chestnut Drive Wymondham, Norfolk NR18 9SB

+44 (0)1953 857800 Email: info@atpowerthrottles.com Web www.atpowerthrottles.com




DRIVE BY WIRE ACTUATOR CONFIGURATION

DCOE 4 & 6 CYLINDER THROTTLES

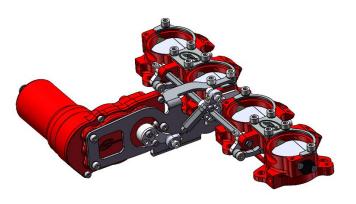

Tel:

MOUNT 'A' STRAIGHT LEFT PART No. 102-106-00055



MOUNT 'B' STRAIGHT RIGHT PART No. 102-106-00056






MOUNT 'C' 45 DEGREES LEFT PART No. 102-106-00080



MOUNT 'D' 45 DEGREES RIGHT PART No. 102-106-00066



NOTE: MINIMUM PORT CENTRES REQUIRED TO ALLOW FOR THE ACTUATOR IS 90MM.

FOR 6 CYLINDER THROTTLES PLEASE SPECIFY LOCATION OF ACTUATOR I.E. BETWEEN PORTS 2 & 3 OR BETWEEN 4 & 5

BESPOKE OPTIONS ON REQUEST BUT WILL INCUR DESIGN & CNC PROGRAMING COST. PLEASE CONTACT AT POWER FOR ADVICE

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regards to purchase orders, the agreed particulars shall prevail. AT Power does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.